For additional information, assistance and orders please contact us at:

Custom Machine & Tool Co., Inc.
301 Winter St. Unit I, Po Box 298
Hanover, MA 02339

tel (800) 355-5949
(781) 924-1003

fax (800) 355-4490
(781) 924-5154

info@cmtco.com
www.cmtco.com

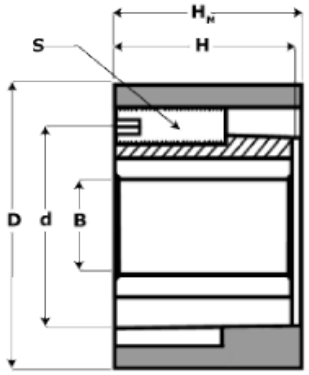

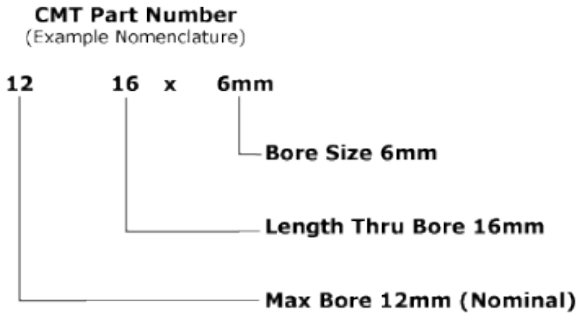

Concentric Maxi Torque Stock Sizes and Dimensions

CMT Part Number	Dimensions					Set Screw			Torque
	B	d	H	H_M	D*	S	S_I	M_S	M_T**
0606	2-6 / .125-.250	.359"	.250"	.265"	.551"	M2.5	1.30	7.50	35-82
0609	3-6 / .125-.250	.392"	.375"	.395"	.591"	M3	1.50	9.00	40-90
0909	4-9 / .156-.375	.536"	.375"	.395"	.752"	M3	1.50	9.00	62-159
0912	5-9 / .156-.375	.563"	.500"	.530"	.822"	M4	2.00	19.00	137-252
1212	6-12 / .250-.500	.688"	.500"	.530"	.975"	M4	2.00	19.00	168-336
1216	6-12 / .250-.500	.745"	.625"	.655"	1.054"	M5	2.50	42.00	230-575
1616	8-16 / .3125-.625	.857"	.625"	.655"	1.170"	M5	2.50	42.00	290-726
1620	8-16 / .3125-.625	.900"	.787"	.827"	1.240"	M6	3.00	68.00	389-875
2020	10-20 / .4375-.750	1.057"	.787"	.827"	1.417"	M6	3.00	68.00	531-1100
2025	10-20 / .4375-.750	1.140"	.984"	1.034"	1.590"	M6	3.00	68.00	538-1120
2530	12-25 / .500-1.000	1.355"	1.181"	1.241"	1.900"	M8	4.00	158.00	1115-2347
3036	16-30 / .625-1.1875	1.575"	1.417"	1.496"	2.200"	M8	4.00	158.00	1512-2795

B - Bore Range (Metric/Inches)
d - Bushing Diameter (Inches)
H - Bushing Length (Inches)
D - Minimum Hub Diameter (Inches)
H_M - Hub Minimum Length (Inches)
S - Screw Size (Metric)
S_I - Hex Key Size (Metric)
M_S - Required Torque Set Screw (in-lbs)
M_T - Slippage Torque Range (in-lbs)

Shaft size to be (h6) or Nominal Diameter +.0000-.0005

* Minimum hub diameter is based on a material with a yield strength of 276 Mpa (40,000 PSI)

** Slippage torques are as modeled and do not include safety factors. Actual transmissable torque will vary per shaft size & Service Factors - SEE CHARTS